

2005

10/536781

PGB 2003 / 005370



INVESTOR IN PEOPLE

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

REC'D 13 JAN 2004

WIPO

PCT

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that the attached copy of the request for grant of a Patent (Form 1/77) bears an amendment, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated

25 November 2003

The
Patent
Office



177

180EDN E77 129-12 007829
W01/7700 0.00-0229355.3

The Patent Office

Cardiff Road
Newport
Gwent NP10 8QQ

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference	J00044658GB		
2. Patent application number (The Patent Office will fill in this part)	0229355.3		17 DEC 2002
3. Full name, address and postcode of the or of each applicant (<u>underline all surnames</u>)	The BOC Group plc Chertsey Road Windlesham Surrey GU20 6HJ United Kingdom Patents ADP number (if you know it) If the applicant is a corporate body, give the country/state of its incorporation		
	UK 7975 949001		
4. Title of the invention	Vacuum Pumping Arrangement		
5. Name of your agent (if you have one)	RGC Jenkins & Co.		
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	26 Caxton Street London SW1H 0RJ United Kingdom Patents ADP number (if you know it)		
	03966736001 THE BOC Group plc CHERTSEY ROAD WINDLESHAM SURREY GU20 6HJ 5/1/77 13.11.03 JAM		
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications (and if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application		Date of filing (day / month / year)
8. Is a statement of inventorship and of right to grant of a patent required in support of this request (Answer 'Yes' if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))	YES		

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description 9

Claim(s) 3

Abstract 1

Drawing(s) 3 + 3

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translation of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature


R.G.C. JENKINS & CO

Date 17 December, 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

A. K. Abbie 020-7931-7141.

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay, please contact the Patent Office.

VACUUM PUMPING ARRANGEMENT

The present invention relates to a vacuum pumping arrangement comprising a turbomolecular pumping mechanism and a molecular drag pumping mechanism connected in series.

A known vacuum pumping arrangement comprises a turbomolecular pumping mechanism connected in series with a molecular drag pumping mechanism, the latter of which can be of any suitable type such as a Holweck or a Gaede type pumping mechanism. A backing pump is generally provided to reduce pressure at the exhaust of the arrangement and may be of any suitable type such as a regenerative pump or claw pump.

The turbomolecular pumping mechanism comprises one or more circumferential arrays of angled blades supported at a generally cylindrical rotor body. During normal operation, the rotor, which is coupled to a drive shaft, is rotated between 20,000 and 200,000 revolutions per minute, during which time the rotor blades collide with molecules in a gas urging them towards the pump outlet. The molecular drag pumping mechanism comprises a rotor, which may comprise a hollow cylinder in a Holweck type pumping mechanism, coupled to the drive shaft for simultaneous rotation with the turbomolecular pumping mechanism. Rotation of the molecular drag pumping mechanism imparts a velocity to gas molecules entering it from the exhaust of the turbomolecular pumping mechanism tangentially to the

circumference of the cylinder and along spiral channels formed between a stator and the cylinder towards the drag outlet.

The cylinder of a Holweck type pumping mechanism extends generally axially with a circumference about the axis of the drive shaft, and is supported by an apertured plate extending radially from the drive shaft between the turbomolecular pumping mechanism and the cylinder. Therefore, in use, gas passes from the outlet of the turbomolecular pumping mechanism, through the apertured plate and into the molecular drag pumping mechanism.

It is desirable to provide an improved vacuum pumping arrangement.

The present invention provides a pumping arrangement comprising a turbomolecular pumping mechanism and a molecular drag pumping mechanism connected in series, a rotor of the molecular drag pumping mechanism being supported by the rotor blades of the turbomolecular pumping mechanism.

Other aspects of the present invention are defined in the accompanying claims.

In order that the present invention may be well understood, two embodiments thereof, which are given by way of example only, will now be described with reference to the accompanying drawings, in which:

Figure 1 is a cross-sectional view of a vacuum pumping arrangement shown schematically;

Figure 2 is a perspective view from above and one side of a rotor of a turbomolecular pumping mechanism;

Figure 3 is a perspective view from below and one side of the rotor in Figure 2;

Figure 4 is an elevation of the rotor in Figure 2;

Figure 5 is a plan of the rotor in Figure 2; and

5 Figure 6 is a cross-sectional view of another vacuum pumping arrangement shown schematically.

Referring to Figure 1, vacuum pumping arrangement 10 is shown, which comprises a molecular pumping mechanism 12 and a backing pumping mechanism 14. The molecular pumping mechanism 12 comprises a
10 turbomolecular pumping mechanism 16 and a molecular drag, or friction, pumping mechanism 18 connected in series. The backing pumping mechanism 14 comprises a regenerative pumping mechanism, which as shown is provided and driven on the same drive shaft as the molecular
pumping mechanism. Alternatively, a backing pump may be provided as a
15 separate unit from the molecular pumping mechanism. A further molecular drag pumping mechanism 20 may be provided between molecular drag pumping mechanism 18 and regenerative pumping mechanism 14. Molecular
drag pumping mechanism 20 comprises three drag pumping stages in series, whereas molecular drag pumping mechanism 18 comprises two drag pumping
20 stages in parallel.

Vacuum pumping arrangement 10 comprises a housing in three separate parts 22, 24, 26. Parts 22 and 24 may form the inner surfaces of the molecular pumping mechanism 12 and the molecular drag pumping

mechanism 20, as shown. Part 26 may form the stator of the regenerative pumping mechanism 14.

Part 26 defines a counter-sunk recess 28 which receives a lubricated bearing 30 for supporting a drive shaft 32. Bearing 30 may be lubricated, for instance with grease, because it is in a part of the pumping arrangement 10 distal from the inlet of the pumping arrangement. The inlet of the pumping arrangement may be in fluid connection with a semiconductor processing chamber in which a clean or oil free environment is required.

Drive shaft 32 is driven by motor 34 which as shown is supported by parts 22 and 24 of the housing. The motor may be supported at any convenient position in the vacuum pumping arrangement. Motor 34 is adapted to be able to power the regenerative pumping mechanism 14, molecular drag pumping mechanism 20 and molecular pumping mechanism 12. Generally, a regenerative pumping mechanism requires more power for operation than a molecular pumping mechanism, the regenerative pumping mechanism operating at pressures close to atmosphere where windage and air resistance is relatively high. A turbomolecular pumping mechanism, or molecular drag pumping mechanism requires relatively less power for operation, and therefore, a motor selected for powering a regenerative pump is also generally suitable for powering a turbomolecular pumping mechanism or molecular drag pumping mechanism.

Regenerative pumping mechanism 14 comprises a rotor fixed relative to drive shaft 32. As shown, the regenerative pumping mechanism 14

comprises three pumping stages, and for each stage, a circumferential array of rotor blades 38 extends substantially orthogonally from one surface of the rotor body 36. The rotor blades 38 of the three arrays extend axially into respective circumferential pumping channels 40 disposed concentrically in part 26 which constitutes the stator of the regenerative pumping mechanism 14. During operation, drive shaft 32 rotates rotor body 36 which causes the rotor blades 38 to travel along the pumping channels, pumping gas from inlet 42 in sequence along the radially outer pumping channel, radially middle pumping channel and radially inner pumping channel where it is exhausted from exhaust 44 at pressures close to or at atmospheric pressure.

Extending orthogonally from the rotor body 36 are two cylindrical drag cylinders 46 which together form the rotors of molecular drag pumping mechanism 20. The drag cylinders 46 are made from carbon fibre composite material which is both strong and light. The reduction in mass when using carbon fibre composite material drag cylinders produces less inertia when the molecular drag pumping mechanism is in operation. Accordingly, the speed of the molecular drag pumping mechanism is easier to control.

The molecular drag pumping mechanism 20 shown schematically is a Holweck type drag pump in which stator portions 48 define a spiral channel between the inner surface of housing part 24 and the drag cylinders 46. Three drag stages are shown, each of which provides a spiral path for gas flow between the rotor and the stator. The gas flow follows a tortuous path flowing consecutively through the drag stages in series.

The molecular pumping mechanism 12 is driven at an end of drive shaft 32 distal from the regenerative pumping mechanism 14. The drive shaft 32 may optionally be supported by back up bearing. A magnetic bearing 54 is provided between rotor body 52 and a cylindrical portion 56 fixed relative to the housing 22. A passive magnetic bearing is shown in which like poles of a magnet repel each other resisting radial movement of rotor body 52 relative to the central axis A. Other types of suitable bearings may be used as required.

A circumferential array of angled rotor blades 58 extend radially outwardly from rotor body 52. At approximately half way along the radial length of the rotor blades, an annular support ring 60 is provided, to which is fixed the drag cylinder, or rotor, 62 of molecular drag pumping mechanism 18, so that the rotor blades of the turbomolecular pumping mechanism support the rotor of the molecular drag pumping mechanism. Molecular drag pumping mechanism 18 comprises two drag stages in parallel with a single drag cylinder 62, one stage being radially inward thereof and one stage being radially outward thereof. Each of the stages comprise stator portions 64 with tapered inner walls 66 of the housing 22 forming a spiral molecular gas flow channel. An outlet 68 is provided to exhaust gas from the molecular drag pumping mechanism 18.

The use of the rotor blades of the turbomolecular pumping mechanism 16 for supporting the rotor of the molecular drag pumping mechanism 18 avoids the need to provide a separate support plate for the rotor of the molecular drag pumping mechanism as used in the prior art described above.

Therefore, the molecular pumping mechanism is less complicated and more compact than in the prior art. Also, it will be appreciated that the support plate, albeit an apertured support plate, will to some extent reduce the flow of gas between the turbomolecular pumping mechanism and the molecular drag pumping mechanism and therefore, act as an impediment to efficiency. There is no such impediment with the arrangement of Figure 1 where gas is allowed to flow freely from the turbomolecular pumping mechanism to the molecular drag pumping mechanism.

Figures 2 to 5 show the rotor of the turbomolecular pumping mechanism 16 in more detail. The rotor comprises the rotor body 52 which forms a hub for coupling to the drive shaft 32 (not shown in these Figures). Extending radially outwardly from the rotor body 52 are the plurality of angled rotor blades 58. Integrally formed with the rotor blades 58 is the annular ring 60 which is provided at a central radial portion of the rotor blades, or about half way along their length. The rotor, or cylinder, of the molecular drag pumping mechanism is fixed to the annular ring by any suitable method so that the rotor blades can support the rotor of the molecular drag pumping mechanism.

During normal operation, inlet 70 of pump arrangement 10 is connected to a chamber, the pressure of which it is desired to be reduced. Motor 34 rotates drive shaft 32 which in turn drives rotor body 36 and rotor body 52. Gas in molecular flow conditions is drawn in through inlet 70 to the turbomolecular pumping mechanism 16 where it is urged by the rotor blades

58 along both parallel drag pumping stages 18 and through outlet 68. Gas is then drawn through the three stages in series of the molecular drag pumping mechanism 20 and into the regenerative pumping mechanism through inlet 42. Gas is exhausted at atmospheric pressure or thereabouts through exhaust port 44.

There now follows a description of a further embodiment of the present invention. For brevity, the further embodiment will be discussed only in relation to the parts thereof which are different to the first embodiment and like reference numerals will be used for like parts.

Figure 6 shows a vacuum pumping arrangement 100 in which the molecular pumping mechanism 12 comprises a turbomolecular pumping mechanism 16 having two pumping stages in series. Two arrays of angled rotor blades 58 extend radially outwardly from the hub of the rotor body 52 with a stator formation 72 between the arrays. The rotor blades of the downstream or last stage of the turbomolecular pumping mechanism support the rotor of the molecular drag pumping mechanism and are provided with the annular ring 60 to which the rotor of the molecular drag pumping mechanism is fixed.

In a modification of the embodiments described above, the molecular drag pumping mechanism 18 comprises more than one drag cylinder, or rotor, 62 supported by the rotor blades 38 of the turbomolecular pumping mechanism 16. The turbo blades may therefore be provided with radially spaced annular rings to which are fixed respective drag pump rotors. With

this arrangement, for example, if there are three drag pump rotors, there can be up to six parallel drag pump stages, with two parallel pumping paths radially inwardly and radially outwardly of each rotor.

Although the present invention has been described with reference to
5 Figures 1 and 6 in which molecular pumping mechanism 12 is driven by a common shaft with regenerative pumping mechanism 14 and which together form one pumping unit, the present invention is not restricted in this way. Alternatively, the molecular pumping mechanism may form a pumping unit separate from the regenerative pumping mechanism, both of which are driven
10 by separate motors and separate drive shafts.

CLAIMS

1. A vacuum pumping arrangement comprising a turbomolecular
pumping mechanism and a molecular drag pumping mechanism connected in
5 series, a rotor of the molecular drag pumping mechanism being supported by
the rotor blades of the turbomolecular pumping mechanism.

2. A vacuum pumping arrangement as claimed in claim 1, wherein the
rotor blades are provided with an annular ring to which said rotor of the
10 molecular drag pumping mechanism is fixed.

3. A vacuum pumping arrangement as claimed in claim 2, wherein the
turbomolecular pumping mechanism has a plurality of stages and the rotor
blades of at least the last stage are provided with said annular ring.

15

4. A vacuum pumping arrangement as claimed in any one of the
preceding claims, wherein the rotor of the molecular drag pumping
mechanism is supported approximately half way along the radial length of the
rotor blades of the turbomolecular pumping mechanism.

20

5. A vacuum pumping arrangement as claimed in claim 1, wherein the
molecular drag pumping mechanism has a plurality of rotors supported by said
rotor blades of said turbomolecular pumping mechanism.

6. A vacuum pumping arrangement as claimed in claim 5, wherein the plurality of rotor blades are fixed to respective radially spaced annular rings provided with the rotor blades of the turbomolecular pumping mechanism.

5

7. A vacuum pumping arrangement as claimed in any one of the preceding claims, wherein the or each rotor of the molecular drag pumping mechanism has associated therewith two parallel pumping paths comprising a pumping path radially inwardly of the or each rotor and a pumping path radially outwardly of the or each rotor.

10

8. A vacuum pumping arrangement as claimed in any one of the preceding claims, wherein the molecular drag pumping mechanism is of a holweck type.

15

9. A vacuum pumping arrangement as claimed in any one of the preceding claims, further comprising a second molecular drag pumping mechanism the rotor of which is supported by the rotor of a regenerative pumping exhausting mechanism.

20

10. A vacuum pumping arrangement as claimed in any one of the preceding claims, wherein the rotor of the or each molecular drag pumping mechanism is made from carbon fibre composite material.

11. A vacuum pumping arrangement as claimed in any one of the preceding claims, wherein the rotor blades of the turbomolecular pumping mechanism are made from aluminium.

5

12. A vacuum pumping arrangement as claimed in claim 2, wherein the annular ring is made from aluminium.


ABSTRACT





VACUUM PUMPING ARRANGEMENT

FIG 1

5 A turbomolecular vacuum pumping arrangement comprises a circumferential array of angled rotor blades 58 extending radially outwardly from rotor body 52 of a turbo pump 16. At approximately half way along the radial length of the rotor blades⁵⁸, an annular support ring 60 is provided, to which is fixed a drag cylinder, or rotor, 62 of a drag pump 18 connected in series with the turbo pump 16, so that the rotor blades⁵⁸ of the turbo pump 16 support the rotor⁶² of the drag pump¹⁸. Drag pump 18 comprises two drag stages in parallel with a single drag cylinder 62, one stage being radially inward thereof and one stage being radially outward thereof.

10

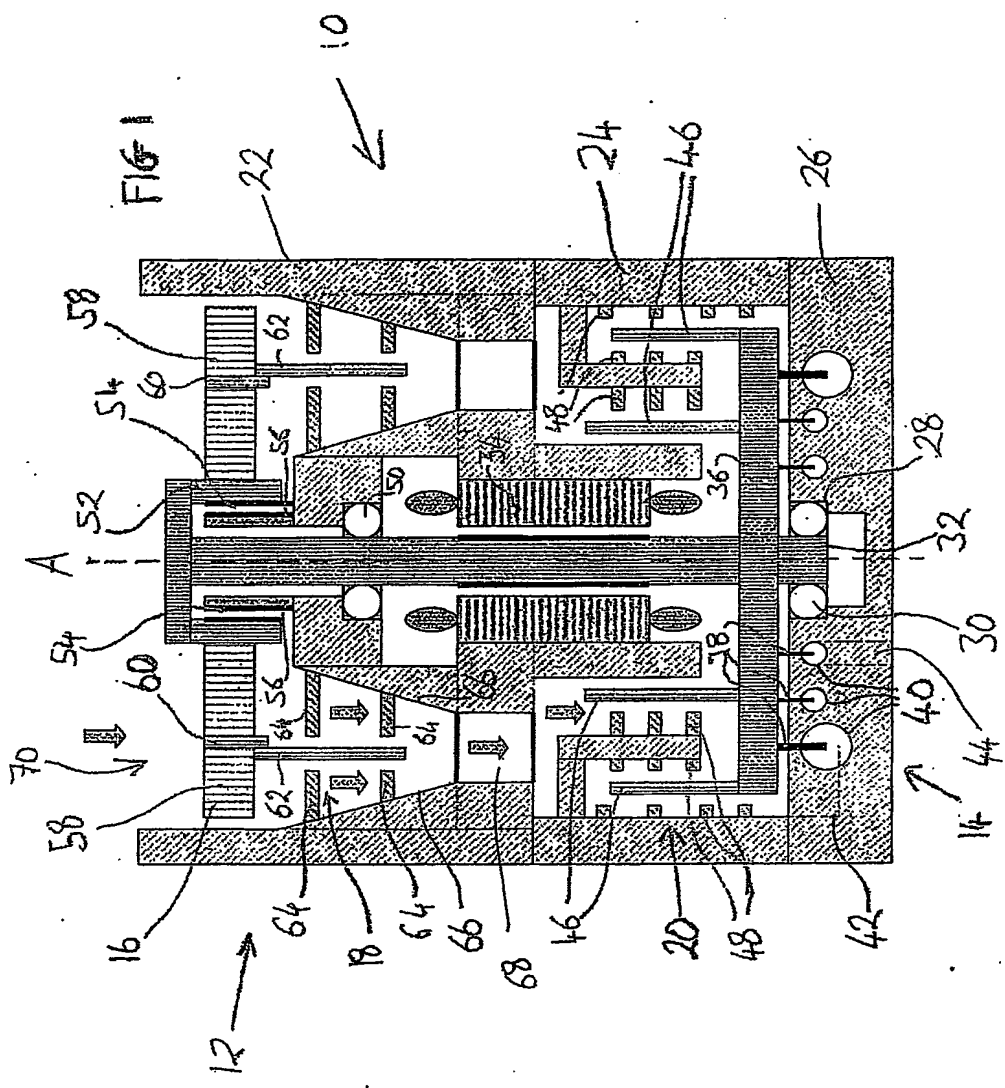

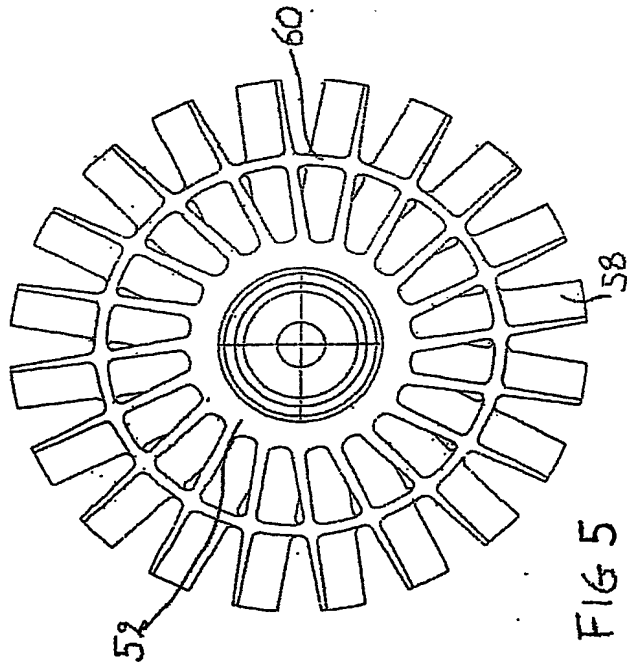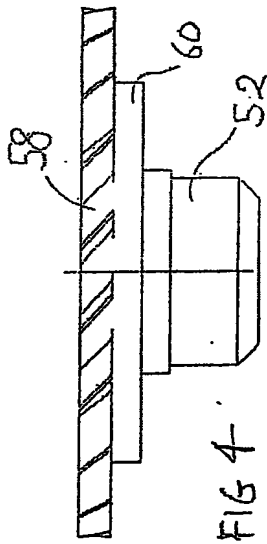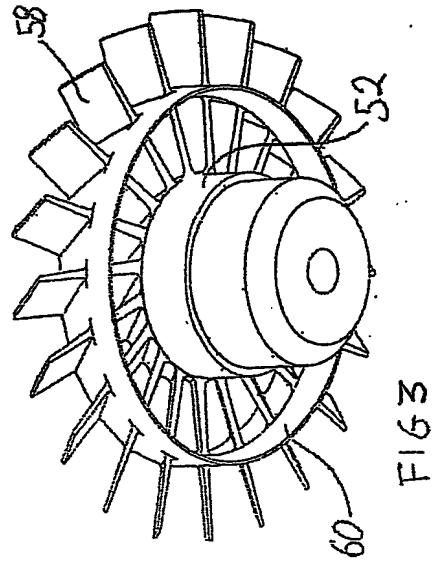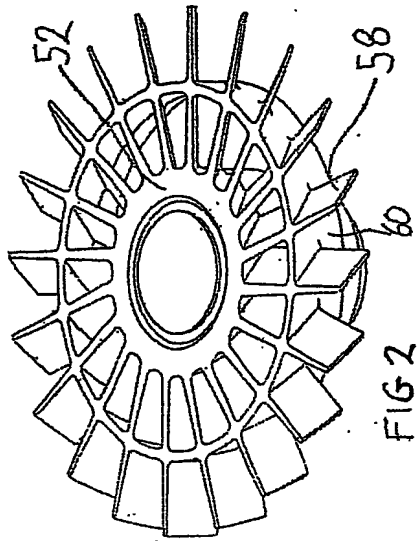

3/3

